


# Configuration for the Oki 395 Dot Matrix Printer

## Printer Current Configurations

To print out a list of the settings currently engaged, hold down the **QUIET** button and turn the printer on., then press the **PRINT** button.

## Reset the printer to Factory Defaults

To reset your printer to the factory defaults, turn the printer off, then hold the **SELECT** and **PARK** buttons while turning the printer back on.

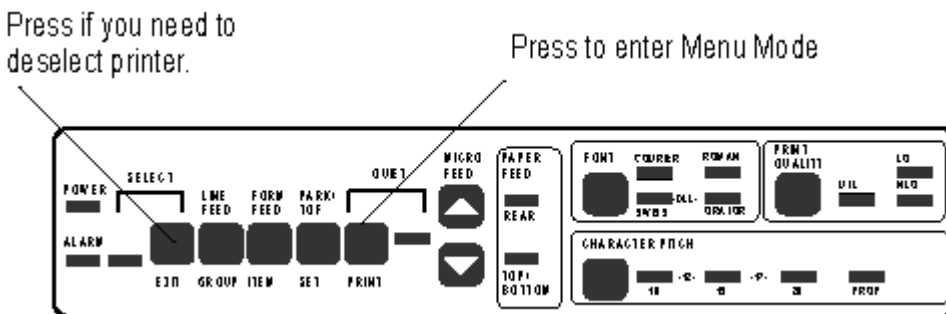

## Reconfigure the printer

Turn the printer's power off. With the power off, hold down the **QUIET** button and turn the printer on.

To Configure the printer, press the following buttons in the order they appear below:

**Group (1x)** This should put you in the PRINTER CONTROL group.  
**Set (1x)** To set your emulation to EPSON .

**Group (2x)** This will put you in the SET-UP group.  
**Set (1x)** To set your graphics option to BI-DIRECTIONAL.

**Group (6x)** This should put you in the SERIAL INTERFACE group  
**Item (4x)** This will take you to the Busy Line option.  
**Set (2x)** To change this option to DTR.  
**Item (2x)** This will take you to the DSR Signal item group.  
**Set (1x)** To change this option to invalid.

After going through this procedure press EXIT to save your settings and return the printer online.