


MODEM ERROR: DEVICE IS BUSY

1. If the machine is a new machine then you will need to edit the call script.
2. Type `cd /abcs/bin` and press enter.
3. type `n te call` and press enter.
4. Press **F2** and **F** to find `abcsedab` and press enter.

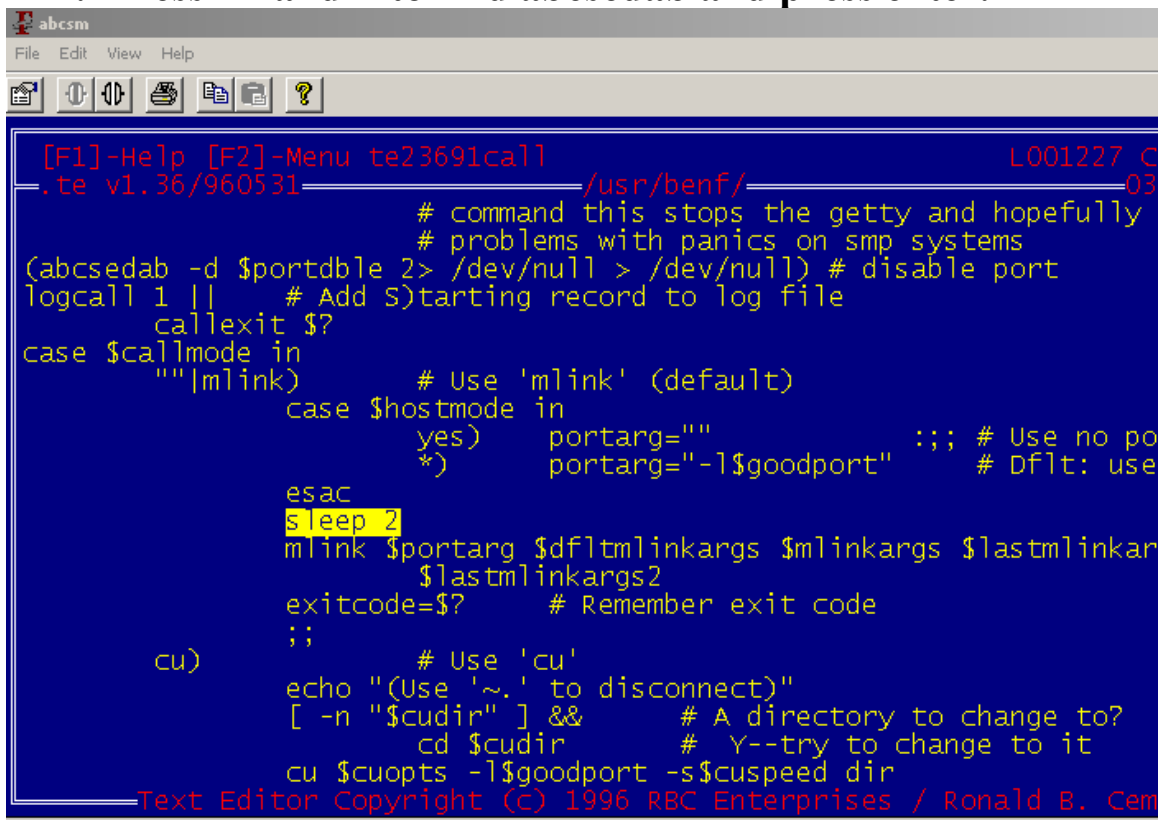

```
[F1]-Help [F2]-Menu te23691call L001227 C
.te vl.36/960531 /usr/benf/ 03
# command this stops the getty and hopefully
# problems with panics on smp systems
(abcsedab -d $portdble 2> /dev/null > /dev/null) # disable port
logcall 1 || # Add S)tarting record to log file
callexit $?
case $callmode in
  ""|mlink) # Use 'mlink' (default)
    case $hostmode in
      yes) portarg="" ;; # Use no po
      *) portarg="-l$goodport" # Dflt: use
    esac
    sleep 2
    mlink $portarg $dfldmlinkargs $mlinkargs $lastmlinkar
      $lastmlinkargs2
    exitcode=$? # Remember exit code
    ;;
  cu) # Use 'cu'
    echo "(Use '~.' to disconnect)"
    [ -n "$cudir" ] && # A directory to change to?
      cd $cudir # Y--try to change to it
    cu $cuopts -l$goodport -s$cuspeed dir
Text Editor Copyright (c) 1996 RBC Enterprises / Ronald B. Cem
```

5. Arrow down 9 lines and press enter. **NOTE:** this should place and extra line under the word `esac`.
6. In this line you should type `sleep 2` and press enter.
7. Press **F2** and **x** to save.
8. Type `disable ttya01 ttyA01` and press enter. **NOTE:** disable the port that your modem is on.. `a01` is just an example.